



DECORATIVE & ARCHITECTURAL
CONCRETE SOLUTIONS

SURFACE PREPARATION



SCR

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 150 ft² (13.9 m²) Uncut (see TDS for dilution rates)

Description: Mild acid detergent that etches, cleans and lightly degreases concrete in preparation for overlays and stains (rinse with water, no neutralization).

Scan with QR Reader



Elasto-Shield

Packaging: 3.5 gal. (13.2 L) & 5 gal. (18.9 L) pails

Coverage: 300 ft² (27.9 m²) per gallon, per coat (8 mills wet)

Description: Ready-to-use waterproofing & crack prevention elastomeric liquid membrane.

Scan with QR Reader



LD1800

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 150 ft² (13.9 m²) per gallon (depending on porosity, see TDS)

Description: Helps make concrete stronger and more durable, slows moisture migration and efflorescence.

Scan with QR Reader



EnviroStrip

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 150 ft² (13.9 m²) per gallon

Description: Non-flammable, environmentally safe, citrus based stripper for acrylic seals, as well as being a light degreaser.

Scan with QR Reader



GlueRemove

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 150 ft² (13.9 m²) per gallon

Description: Safe non-flammable, water based carpet glue & mastic remover.

Scan with QR Reader



SURFACE PREPARATION



FastStrip Plus

Packaging: 5 gal. (18.9 L) pails

Coverage: 150 ft² (13.9 m²) per gallon

Description: Solvent-based stripper for removing heavy coatings and solvent based sealers.

Scan with QR Reader



SurePrime

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 400 - 500 ft² (37.2 - 46.5 m²) per gallon

Description: Liquid acrylic polymer that enhances the bonding of cementitious products for both vertical and horizontal concrete, cement board, drywall, and other construction materials.

Scan with QR Reader



Polymer Concentrate

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Solids: 50% Solids Polymer Resin

Description: Liquid acrylic used to increase bonding of an existing concrete surface to a new cementitious overlay.

Scan with QR Reader



SCT-22

Packaging: 22 oz. (650 mL) cartridge (requires gun)

Coverage: 1/4" (6.4 mm) wide x 3/4" (19.1 mm) deep x 17' (5.2 m) crack (without sand)

Description: A rapid set, high strength, ultra-low viscosity urethane concrete crack and spall treatment.



Epoxy Crack Treatment

Packaging: 3 gal. (11.4 L) kit

Coverage: 1/8" (3.2 mm) wide x 3/4" (19.1 mm) deep x 600' (183 m) crack

Description: Two part crack treatment to treat static cracks in concrete or to minimize their return in active, structural cracks.

Scan with QR Reader



STAMPING CONCRETE



Integral Color

Packaging: 10 lb. (4.5 kg) water-soluble bags
Colors: 18 standard colors made from 6 stock color bags
Coverage: *See Color Chart*
Description: Iron oxide pigments used to integrally color freshly poured concrete. Packaged in biodegradable bags for ready-mix trucks.

Scan with QR Reader



Color Hardener

Packaging: 60 lb. (27.2 kg) pails or bags
Colors: 30 standard
Coverage: 100 ft² (9.3 m²) per pail (varies based on color, see TDS)
Description: Pre-mixed, dry-shake pigment for coloring and hardening freshly poured concrete. Specially formulated to allow for faster application.

Scan with QR Reader



Powder Release

Packaging: 30 lb. (13.6 kg) pails
Colors: 18 standard
Coverage: 750 - 1,000 ft² (65 - 93 m²) per pail
Description: Powder releasing agent and secondary coloring system integrated with iron oxide pigments to color concrete and release stamping tools from concrete.

Scan with QR Reader



SureRelease Liquid

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208.2 L) drums
Coverage: 250 - 500 ft² (23.2 - 46.5 m²) per gallon, per coat
Description: Used to release any decorative imprinting tool from concrete or overlay.

Scan with QR Reader



Eco-Accent

Packaging: 5 lb. (2.3 kg) pails
Colors: 10 standard
Coverage: 3,000 - 5,000 ft² (279 - 465 m²) per pail (varies by color & application, see TDS)
Description: Zero VOC, water based, UV-Stable secondary coloring agent for both new and existing stamped or textured concrete surfaces.

Scan with QR Reader



STAMPING CONCRETE



Translucent Highlighting

Packaging: 5 gal. (18.9 L) pails

Colors: 6 standard

Coverage: 150 - 175 ft² (13.9 - 16.3 m²) per gallon

Description: Solvent based "antiquing" or secondary coloring system for stamp overlay and stamped concrete. Can be applied over an existing acrylic sealed surface.

Scan with QR Reader



Surface Delay

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 200 - 400 ft² (18.6 - 37.2 m²) per gallon, diluted (see TDS)

Description: Delays the initial evaporation of water from overlays/slabs.

Scan with QR Reader



SOLVENTS



Xylene

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Coverage: N/A

Description: Solvent cleaning agent commonly used to clean up spills, over-spray, and contaminated tools.

Scan with QR Reader



Aromatic 100 Solvents

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Coverage: N/A

Description: A slower evaporating solvent cleaning agent commonly used to clean up spills, over-spray, and contaminated tools.

Scan with QR Reader



NON-SLIP



SureGrip

Packaging: 1 qt. (946 mL) containers

Coverage: 200 ft² (18.6 m²) per quart

Description: Premium grade (toss-on), aluminum oxide for broadcasting a slip resistance product between coats for sealers & coatings.

Scan with QR Reader



SureGrip Additive

Packaging: 1 qt. (946 mL) containers

Coverage: Add 1 quart per 5 gallon pail of acrylic sealer

Aggregate Size: 300 microns

Description: Premium grade, polypropylene additive, is a slip resistance product for resin based sealers.

Scan with QR Reader



SureGrip Additive HD

Packaging: 1 qt. (946 mL) containers & 5 gal. (18.9 L) pails

Coverage: 1 quart per 5 gallon pail of acrylic sealer

Aggregate Size: 840 microns

Description: Premium grade polypropylene with an 840 micron or 20 mesh resistance, will not crush.

Scan with QR Reader



SureFinish - Gloss

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 1,500 ft² (139 m²) per gallon first coat; subsequent coatings 2,000-3,000 ft² (186 - 279 m²) per gallon

Description: "Mop-on" industrial protective acrylic floor finish.

Scan with QR Reader



SureFinish - Matte

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails

Coverage: 1,500 ft² (139 m²) per gallon first coat; subsequent coatings 2,000-3,000 ft² (186 - 279 m²) per gallon

Description: "Mop-on" industrial protective acrylic floor finish.

Scan with QR Reader



COLORANTS



Color Packs

Packaging: pre-measured bag

Colors: 30 standard

Coverage: 1 color pack per bag overlay mix; 2 per XS PreCast Modifier

Description: Pre-measured integral coloring for SureCrete's white cement-based overlay and XS mixes.

Scan with QR Reader



Color Packs - Custom

Packaging: pre-measured bag

Coverage: 1 color pack per bag overlay mix; 2 per XS PreCast Modifier

Description: We can create non-standard colors and turn them into a dry pigment that can go into either white or gray Portland cement bag mixes.

Scan with QR Reader



XS Veining

Packaging: 1 qt. (946 mL) containers

Colors: 10 standard

Coverage: Varies depending on application

Description: Used to create the Veining Technique with XS mixes.

Scan with QR Reader



Eco-Accent

Packaging: 5 lb. (2.3 kg) pails

Colors: 10 standard

Coverage: 3,000 - 5,000 ft² (279 - 465 m²) per pail (varies by color & application, see TDS)

Description: Zero VOC, water based, UV-Stable secondary coloring agent for both new and existing stamped or textured concrete surfaces.

Scan with QR Reader



SureStain

Packaging: 1 gal. (3.8 L) pails

Colors: 8 standard

Coverage: 200 ft² (18.6 m²) per gallon (uncut)

Description: Reactive acid concrete stain for creating very specific "earth-tone" designs.

Scan with QR Reader



COLORANTS



Eco-Stain

Packaging: 1 qt. (946 mL) jars (select colors), 1 gal. (3.8 L) & 5 gal. (18.9 L) pails
Colors: 29 standard
Coverage: 200 ft² (18.6 m²) per gallon (uncut, see TDS for dilution rates)
Description: Zero VOC water based penetrating concrete stain (no neutralization or cleanup required). Slab needs porosity for penetration.

Scan with QR Reader



EcoPrime

Packaging: 1 gal. (3.8 L) & 5 gal. (18.9 L) pails
Coverage: 200 - 300 ft² (18.6 - 27.9 m²) per gallon, per coat (diluted 4:1 with water)
Description: Reduces porosity of excessively porous concrete, thus regulating the penetration rate of Eco-Stain.

Scan with QR Reader



Dura-Kote Metallics

Packaging: 16 oz. (473 mL) jars
Colors: 20 standard
Coverage: 1 jar to 3 gallons of Epoxy 100 Clear Coat
Description: Reflective mica pearls that are suspended into an Epoxy 100 % solids to create a unique three dimensional appearance.

Scan with QR Reader



Dura-Kote Flakes

Packaging: 25 lb. (11.3 kg) bags
Colors: 12 pre-blended, multi-colored designs
Coverage: Full Broadcast = 6 - 10 ft² (0.56 - 0.93 m²) per 1 lb. (0.45 kg) of Flake
Description: ¼" (6.4 mm) random shaped colored polymer chips that are broadcasted into a wet epoxy, delivering a vibrant, multihued, slip resistant, seamless floor.

Scan with QR Reader



BAG MIX - OVERLAYS & PATCHING



Flash Patch

Packaging: 20 lb. (9.1 kg) pails & 50 lb. (22.7 kg) bags
Water: Add 4 - 4½ quarts (3.8 - 4.3 L) of water per 50 lb. bag
Coverage: 50 lb. bag covers 0.45 ft³ (0.03 m³) or 12 ft² (1.1 m²) @ ½" (13 mm) depth
Description: Self-bonding, single component cement based chemical patching compound that delivers high compressive strength and fast curing properties.

Scan with QR Reader



Deep Level

Coverage: 50 lb. (22.7 kg) bag covers 12 ft² (1.1 m²) @ ½" (13 mm) thickness
Water: Add 4 quarts (3.8 L) water per 50 lb. bag (SureBond required)
Description: Concrete patching product for use in spalls or holes 1 inch or deeper. Does not allow for a feathered edge; accepts color packs.
Base Color: Gray

Scan with QR Reader



Micro Topping

Coverage: 40 lb. (18.1 kg) bag per 200 - 300 ft² (18.6 - 27.9 m²)
Water: Add 5 - 6 quarts (4.7 - 5.7 L) of water per 50 lb. bag
Description: Self bonding, extremely thin, troweled on overlay, used to create a blank canvas for staining or a tight-troweled finish; accepts color packs.
Base Color: Gray & White

Scan with QR Reader



SureSpray

Coverage: 50 lb. (22.7 kg) bag per 80 - 175 ft² (7.4 - 16.3 m²)
Water: Add 4½ - 6½ quarts (4.3 - 6.2 L) water per 50 lb. bag
Description: Self-bonding, trowelable and sprayable thin overlay for use on concrete slabs. Typical textures include orange peel, bubble, knock down and slop trowel; accepts color packs.
Base Color: White

Scan with QR Reader



SureTex

Coverage: 50 lb. (22.7 kg) bag per 150 - 175 ft² (13.9 - 16.3 m²)
Water: Add 4½ - 6½ quarts (4.3 - 6.2 L) water per 50 lb. bag
Description: Self bonding, trowelable and sprayable thin overlay for use on concrete slabs when creating a knockdown finish (slightly larger aggregate than SureSpray); accepts color packs.
Base Color: White

Scan with QR Reader



BAG MIX - OVERLAYS & PATCHING



SureBroom

Coverage: 50 lb. (22.7 kg) bag covers 160 ft² (14.9 m²) @ 1/32" (0.8 mm) thickness (2 coats recommended)

Water: Add 7 - 8 quarts (6.6 - 7.6 L) water per 50 lb. bag

Description: Self-bonding, extremely durable thin concrete overlay for recreating freshly broomed concrete. Can be troweled or sprayed; accepts color packs.

Base Color: Gray & White

Scan with QR Reader



SureStamp

Coverage: 50 lb. (22.7 kg) bag covers 15 - 18 ft² (1.4 - 1.7 m²) @ 3/8" (9.5 mm) or 20 - 24 ft² (1.9 - 2.2 m²) @ 1/4" (6.4 mm)

Water: Add 3½ - 4 quarts (3.3 - 3.8 L) water per 50 lb. bag (SureBond required)

Description: Stampable overlay product for use on concrete slabs; accepts color packs.

Base Color: White

Scan with QR Reader



Wall Spray

Coverage: 40 lb. (18.1 kg) bag covers 28 - 30 ft² (1.9 - 2 m²) @ 1/4" (6.4 mm)

Water: Add 3½ - 4 quarts (3.3 - 3.8 L) water per 40 lb. bag

Description: Self-bonding, lightweight, cement-based overlay for vertical surfaces containing 35% post-consumer recycled aggregate. When applied to EPS foam, it will dramatically increase flexural and tensile strength. Product can be troweled or sprayed.

Base Color: White

Scan with QR Reader



Wall Stamp

Coverage: 40 lb. (18.1 kg) bag covers 18 ft² (1.7 m²) @ 3/8" (9.5 mm)

Water: Add 5 - 6 quarts (4.7 - 5.7 L) water per 40 lb. bag

Description: Self-bonding, lightweight carvable and stampable overlay for vertical surfaces; accepts color packs.

Base Color: Light Gray

Scan with QR Reader



Retarder

Packaging: 1 gal. (3.8 L) pails

Coverage: Per Bag: SureStamp - 3 oz. (89 mL) / SureSpray - 8 oz. (237 mL) /

SureTex - 7 oz. (207 mL)

Description: Water-borne retarder designed to slow SureCrete's overlay products set time. Coverage ratios will turn SureCrete's "Winter" mixes into "Summer" mixes.

Scan with QR Reader



ACRYLIC SEALERS



CS 250 (Cure & Seal)

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss (color enhancing)

Coverage: 300 - 500 ft² (27.9 - 46.5 m²) per gallon, per coat

Description: Clear, 25% solids, solvent styrene acrylic finishing membrane that enhances the curing process of freshly poured concrete. Helpful in preventing dusting, spalling, moisture and chemical migration. Also resists deicing salts and many chemicals.

Scan with QR Reader



CS 250L (Cure & Seal)

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss (color enhancing)

Coverage: 300 - 500 ft² (27.9 - 46.5 m²) per gallon, per coat

Description: VOC compliant (400 g/L), clear 25% solids, styrene acrylic finishing membrane that enhances the curing process of freshly poured concrete. Helpful in preventing dusting, spalling, moisture and chemical migration, resists deicing salts.

Scan with QR Reader



Super WB

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss & Low Luster

Coverage: 180 - 200 ft² (16.7 - 18.6 m²) per gallon, per coat

Description: Water-based, low VOC (<100 g/L), 30% solids, clear acrylic sealer for vertical & flat concrete surfaces, concrete overlays and many other cementitious surfaces.

Scan with QR Reader



Super 20

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: High Gloss

Coverage: 180 - 200 ft² (16.7 - 18.6 m²) per gallon, per coat

Description: Solvent-based, 600 g/L VOC, 20% solids, clear acrylic sealer for vertical & flat concrete surfaces, concrete overlays and many other cementitious surfaces.

Scan with QR Reader



Super 30

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: High Gloss

Coverage: 180 - 200 ft² (16.7 - 18.6 m²) per gallon, per coat

Description: Solvent-based, 600 g/L VOC, 30% solids, clear acrylic sealer for vertical & flat concrete surfaces, concrete overlays and many other cementitious surfaces.

Scan with QR Reader



ACRYLIC SEALERS



HS 260

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss

Coverage: 200 - 240 ft² (18.6 - 22.3 m²) per gallon, per coat

Description: Solvent-based, 600 g/L VOC, 20% solids, "premium acrylic" sealer that delivers slower evaporating solvents, deeper penetration and bonding to the concrete and helps to slow moisture migration and efflorescence.

Scan with QR Reader



HS 360

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss

Coverage: 200 - 240 ft² (18.6 - 22.3 m²) per gallon, per coat

Description: Solvent-based, 600 g/L VOC, 30% solids, "premium acrylic" sealer that delivers slower evaporating solvents, deeper penetration and bonding to the concrete and helps to slow moisture migration and efflorescence.

Scan with QR Reader



HS 240

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss & Matte

Coverage: 200 - 240 ft² (18.6 - 22.3 m²) per gallon, per coat

Description: Solvent-based, 400 g/L VOC, 20% solids, "premium acrylic" sealer that delivers slower evaporating solvents, deeper penetration and bonding to the concrete and helps to slow moisture migration and efflorescence.

Scan with QR Reader



HS 340

Packaging: 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Gloss

Coverage: 200 - 240 ft² (18.6 - 22.3 m²) per gallon, per coat

Description: Solvent-based, 400 g/L VOC, 30% solids, "premium acrylic" sealer that delivers slower evaporating solvents, deeper penetration and bonding to the concrete and helps to slow moisture migration and efflorescence.

Scan with QR Reader



Pigmented Solvent-Based Acrylic

Packaging: 1 gal. (3.8 L) pails, 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Satin

Colors: 30 Standard / 228 **ON DEMAND COATINGS**

Coverage: 160 - 200 ft² (16.7 - 18.6 m²) per gallon, per coat

Description: Solvent-based, 600 g/L VOC, 30% solids, pigmented acrylic sealer; the first with pigments specifically formulated for superior UV stability on cementitious surfaces.

Scan with QR Reader



ACRYLIC SEALERS



Pigmented Solvent-Based Low VOC Acrylic

Packaging: 1 gal. (3.8 L) pails, 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Satin

Colors: 30 Standard / 228 **ON DEMAND COATINGS**

Coverage: 160 - 200 ft² per gallon, per coat

Description: Solvent-based, 400 g/L VOC, 30% solids, pigmented acrylic sealer; the first with pigments specifically formulated for superior UV stability on cementitious surfaces.

Scan with QR Reader



Pigmented Water-Based Acrylic

Packaging: 1 gal. (3.8 L) pails, 5 gal. (18.9 L) pails & 55 gal. (208 L) drums

Sheen: Satin

Colors: 30 Standard / 228 **ON DEMAND COATINGS**

Coverage: 160 - 200 ft² per gallon, per coat

Description: Water-based, 100 g/L VOC, 30% solids, pigmented acrylic sealer; the first with pigments specifically formulated for superior UV stability on cementitious surfaces.

Scan with QR Reader



HIGH PERFORMANCE COATINGS



Dura-Kote Solvent Polyurethane

Packaging: 2 gal. (7.6 L) & 5 gal. (18.9 L) kits

Sheen: High Gloss & Satin

Coverage: 300 ft² (27.9 m²) per gallon, per coat

Mix Ratio: 4:1 (A:B)

Description: 51% solids, dual-component, solvent acrylic polyurethane that enhances color while providing excellent abrasion and chemical resistance to interior concrete.

Scan with QR Reader



Dura-Kote Water-Based Polyurethane

Packaging: 2 gal. (7.6 L) & 4 gal. (15.1 L) kits

Sheen: Gloss & Matte

Coverage: 400 ft² (37.2 m²) per gallon, per coat

Mix Ratio: 3:1 (A:B)

Description: 57% solids, dual-component, water-based polyurethane delivering: superior bond strength, chemical resistance, zero aroma, and anti-graffiti properties.

Scan with QR Reader



HIGH PERFORMANCE COATINGS



PFC-120

Packaging: 2 gal. (7.6 L) & 5 gal. (18.9 L) kits

Sheen: High Gloss

Coverage: 300 - 400 ft² (27.9 - 37.2 m²) per gallon, per coat

Mix Ratio: 4:1 (A:B)

Description: 67% solids, dual component, hybrid solvent polyaspartic. This coating is UV-stable, has excellent chemical and abrasion resistance, and is set to touch in 2 hours.

Scan with QR Reader



PFC-180

Packaging: 2 gal. (7.6 L), 4 gal. (15.1 L) kits & 20 gal. (75.7 L) kits

Sheen: High Gloss

Coverage: 150 - 200 ft² (13.9 - 18.6 m²) per gallon, per coat

Mix Ratio: 3:1 (A:B)

Description: 80% solids, dual component, thicker build hybrid solvent polyaspartic. It is UV-stable, has excellent chemical and abrasion resistance, and is set to touch in 4 hours.

Scan with QR Reader



Dura-Kote Epoxy 100

Packaging: 3 gal. (11.4 L), 15 gal. (56.8 L) & 150 gal. (568 L) kits

Sheen: High Gloss

Coverage: 40 - 150 ft² (3.7 - 13.9 m²) per gallon, per coat

Mix Ratio: 2:1 (A:B)

Description: 100% solids, dual-component high build coating used with the Metallic system or as a clear coat. Ideal for commercial traffic, abrasion and chemical resistance.

Scan with QR Reader



Dura-Kote Pigmented WB Epoxy

Packaging: 2 gal. (7.6 L) & 5 gal. (18.9 L) kits

Sheen: Gloss

Colors: 30 Standard / 228 **ON DEMAND COATINGS**

Coverage: 125 - 250 ft² (11.6 - 16.3 m²) per gallon, per coat

Mix Ratio: 4:1 (A:B)

Solids: 52% solids

Scan with QR Reader



Dura-Kote Pigmented Epoxy 100

Packaging: 3 gal. (11.4 L), 15 gal. (56.8 L) & 150 gal. (568 L) kits

Sheen: High Gloss

Colors: 30 Standard / 228 **ON DEMAND COATINGS**

Coverage: 40 - 150 ft² (3.7 - 13.9 m²) per gallon, per coat

Mix Ratio: 2:1 (A:B)

Solids: 100% solids

Scan with QR Reader



XTREME SERIES



XS PreCast

Packaging: 50 lb. (22.7 kg) bag & 1 gal. (3.8 L) XS PreCast Modifier

Coverage: 10 ft² (0.9 m²) @ ½" (13 mm) thickness

Water Addition: Up to 16 oz. (473 mL)

Description: Pourable, PVA fiber mix design providing high early strength, superior de-mold times and can create solid color, veining, travertine and pressed textures.

Scan with QR Reader



XS Face

Packaging: 50 lb. (22.7 kg) bag & 1 gal. (3.8 L) XS PreCast Modifier

Coverage: 80 ft² (7.4 m²) @ 1/16" (1.6 mm) thickness

Water Addition: Up to 16 oz. (473 mL)

Description: Sprayable face coating designed to be used in conjunction with XS Backer. This system delivers high early strength, lighter weight casting, and better solid color.

Scan with QR Reader



XS Backer

Packaging: 50 lb. (22.7 kg) bag & 1 gal. (3.8 L) XS PreCast Modifier

Coverage: 10 ft² (0.9 m²) @ ½" (13 mm) thickness

Water Addition: Up to 40 oz. (1.2 L)

Description: Glass AR Fiber rich, hybrid GFRC, cement based reinforcement for use with all other XS bag mixes. Aids in faster de-mold times, higher flexural & tensile strength in castings.

Scan with QR Reader



XS Terrazzo

Packaging: 50 lb. (22.7 kg) bag & 2 gal. (7.6 L) XS PreCast Modifier

Coverage: 20 - 26 ft² (1.9 - 2.4 m²) @ ½" (13 mm) thickness

(depends on aggregate size, see TDS)

Water Addition: Up to 40 oz. (1.2 L)

Description: Pourable, cement based terrazzo formula that allows for the addition of 50 - 80 lb.'s of recycled aggregate to create an elegant polishable surface.

Scan with QR Reader



XS Lightweight Plus 1

Packaging: 35 lb. (15.9 kg) bag & 1 gal. (3.8 L) XS Lightweight Plus Modifier

Coverage: 12 ft² (1.1 m²) @ ½" (13 mm) thickness / 0.5 ft³ (0.01 m³)

Water Addition: Up to 64 oz. (1.9 L)

Description: 50% lighter than concrete, architectural casting material with fire resistant properties.

Scan with QR Reader



XTREME SERIES



XS Lightweight Plus 3

Packaging: 35 lb. (15.9 kg) bag & 1 gal. (3.8 L) XS Lightweight Plus Modifier

Coverage: 14 ft² (1.3 m²) @ ½" (13 mm) thickness / .59 ft³ (0.02 m³)

Water Addition: Up to 1 gal. (3.8 L)

Description: 60% lighter than concrete, architectural casting material with fire resistant properties.

Scan with QR Reader



XS Precast Modifier Concentrate

Packaging: 5 gal. (18.9 L) pails, 55 gal. (208 L) drums & 275 gal. (1,041 L) totes

Coverage: Varies

Mix Ratio: See TDS

Description: Concentrated version of XS PreCast Modifier - can be used for XS PreCast, XS Face, XS Backer and XS Terrazzo.

Scan with QR Reader



XTREME SERIES ACCESSORIES



XS Slurry

Packaging: 5 lb. (2.3 kg) pails

Coverage: Variable

Description: Quickly fills pinholes in precast concrete. White formula allows for it to be colored via concentrated color or color packs.

Water: Up to 1½ qt. (1.4 L) per 5 lb. pail

Scan with QR Reader



XS Packing Additive

Packaging: 1 qt. (946 mL) containers

Coverage: 4 oz. (118 mL) per XS PreCast or XS Face

Description: A thickening agent designed for the XS mixes. Allows for the creation of the "Pressed" texture technique.

Scan with QR Reader



XTREME SERIES ACCESSORIES



XS-327

Packaging: 40 oz. (1.2 L) kits
Sheen: Gloss & Matte
Coverage: 100 - 700 ft² (9.3 - 65 m²) per kit, per coat (see TDS for dilution rates)
Mix Ratio: 3:2 (A:B)
Description: Low VOC (25 g/L), food safe, two component, minimal color enhancement, film forming hybrid water-based polyurethane for concrete & natural stone surfaces.

Scan with QR Reader



XS-PC12

Packaging: 1 qt. (946 mL) kits
Sheen: High Gloss
Coverage: 100 ft² (9.3 m²) per quart, per coat
Mix Ratio: 3:1 (A:B)
Description: Low VOC (400g/L), food safe, dual-component, color enhancing, penetrating, film forming solvent polyurea coating delivering a mirrored finish for concrete & stone.

Scan with QR Reader



Countertop Edge Profiles

Length: 50 ft. (15.2 m) rolls
Profiles: Bullnose, Chamfer, Eased Square, Ogee
Depth: 1½" (38 mm)
Description: Fast, easy to use, cut with a razor knife, bendable edge profile system for precast and pour-in-place concrete castings.

Scan with QR Reader



XS Foam Rails

Length: 4 ft. (1.2 m) sticks
Profiles: ¾" (19 mm), 1" (25 mm), 1½" (38 mm) & 2" (51 mm) options
Description: Fast, square edged, high density foam forming system that allows for the fastest setup of template.

Scan with QR Reader



XS Facing Tapes

Length: 100 ft. (30.5 m) rolls
Profiles: ¾" (19 mm), 1" (25 mm), 1½" (38 mm) & 2" (51 mm) options
Description: Thick mil, clear facing tape delivers a smooth square profile edge when placed onto foam, wood, melamine, and many other casting surfaces.

Scan with QR Reader



XTREME SERIES ACCESSORIES



PSA Tape

Length: 100 ft. (30.5 m) rolls

Profiles: 1" (25 mm)

Description: Double-sided pressure sensitive adhesive tape designed to hold the XS foam rails to typical casting surfaces. It's high bond strength eliminates blowouts and aids in the industry's fastest concrete forming system.

Scan with QR Reader



Basalt Structural Rods

Length: 5 ft. (1.5 m) & 10 ft. (3 m) rods

Sizes: 1/8" (3 mm), 1/4" (6 mm), 5/16" (8 mm), 3/8" (10 mm) & 1/2" (12 mm) options

Description: 100% corrosion proof, 100% alkaline proof, non-conductive, heat resistant, hydrophilic non-absorbent, certified Basalt Pure rods designed to replace steel rebar in concrete.

Scan with QR Reader



Basalt Fibers

Length: 6 lb. (2.7 kg) & 50 lb. (22.7 kg) bags

Sizes: 1/2" (13 mm), 1" (25 mm) & 2" (51 mm) options

Description: 100% corrosion proof, 100% alkaline proof, non-conductive, heat resistant, hydrophilic non-absorbent, certified Basalt Pure fibers designed to work in precast, fresh-pour, and other concrete mixes.

Scan with QR Reader



Glass AR Fibers

Length: 6 lb. (2.7 kg) & 50 lb. (22.7 kg) bags


Sizes: 1/2" (13 mm), 1" (25 mm) & 2" (51 mm) options

Description: 100% corrosion proof, 100% alkaline proof, non-conductive, heat resistant, hydrophilic non-absorbent, certified Basalt Pure fibers designed to work in precast, fresh-pour, and other concrete mixes.

Scan with QR Reader



XS-327 SEALER DILUTION RATES

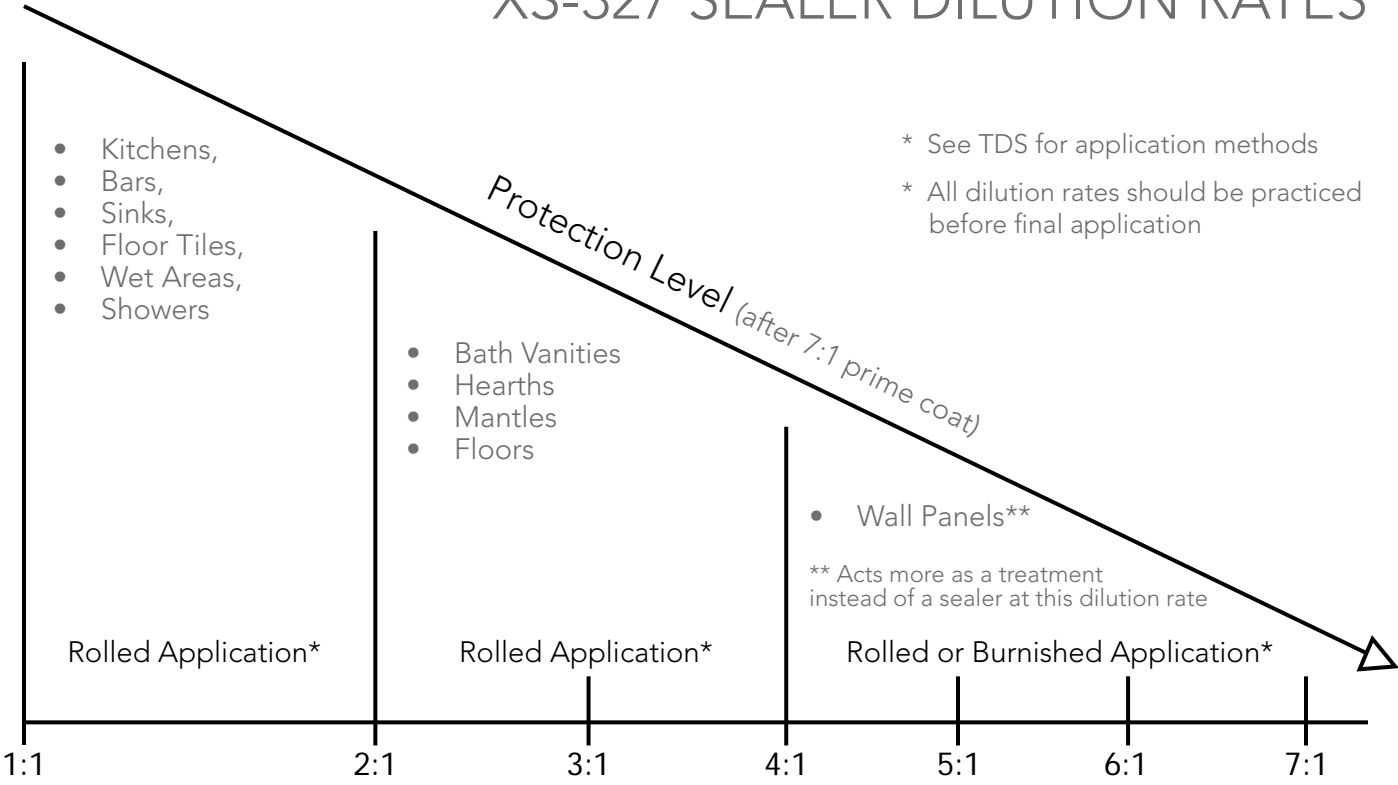

XS BAG MIX MATRIX

# Bags	ft ² @ 1/8"	ft ² @ 1/4"	ft ² @ 3/8"	ft ² @ 1/2"	ft ² @ 3/4"	ft ² @ 1"	ft ² @ 1.5"	ft ² @ 2"
1	40	20	13	10	6.5	5	3.25	2.75
2	80	40	26	20	13	10	6.5	5.5
3	120	60	39	30	19.5	15	9.75	8.25
4	160	80	52	40	26	20	13	11
5	200	100	65	50	32.5	25	16.25	13.75
6	240	120	78	60	39	30	19.5	16.5
7	280	140	91	70	45.5	35	22.75	19.25
8	320	160	104	80	52	40	26	22
9	360	180	117	90	58.5	45	29.25	24.75
10	400	200	130	100	65	50	32.5	27.5
11	440	220	143	110	71.5	55	35.75	30.25
12	480	240	156	120	78	60	39	33
13	520	260	169	130	84.5	65	42.25	35.75
14	560	280	182	140	91	70	45.5	38.5
15	600	300	195	150	97.5	75	48.75	41.25

INTEGRAL COLOR CHART



Caramel Buff Light 1 Bag / 2 Yards



Caramel Buff Medium 1 Bag / 1 Yard



Caramel Buff Dark 1.5 Bags / 1 Yard



Watermelon Light 1 Bag / 2 Yards



Watermelon Medium 1 Bag / 1 Yard



Watermelon Dark 2 Bags / 1 Yard



Red Barn Light 1 Bag / 2 Yards



Red Barn Medium 1 Bag / 1 Yard



Red Barn Dark 2 Bags / 1 Yard



Chestnut Light 1 Bag / 2 Yards



Chestnut Medium 1 Bag / 1 Yard




Chestnut Dark 2 Bags / 1 Yard



Chocolate Light 1 Bag / 2 Yards



Chocolate Medium 1 Bag / 1 Yard



Chocolate Dark 2 Bags / 1 Yard



Gun Metal Light 1 Bag / 2 Yards



Gun Metal Medium 1 Bag / 1 Yard



Gun Metal Dark 2 Bags / 1 Yard

Used With: 5 Sack Mix, 5.5 Sack Mix, 6 Sack Mix

Note: The color of raw materials, or a sample strip, is subject to variation from the color chip reproduced above. Colors above are as accurate as can be produced using finest materials of reproduction. Job site variations from the above color may occur due to differences in local raw materials and methods of application. Before final color selection is made, a job site panel should be produced and approved.

MAIN COLOR CHART

				
NATURAL WHITE	CORAL	DESERT SAND*	CARIBBEAN CREAM	SPICE
				
LIMESTONE	TERRA COTTA	PUTTY*	IVORY	BROWN DERBY
				
MINT	OLD BRICK	SAND BUFF*	ANTIQUE WHITE	CHOCOLATE*
				
GREEN SLATE*+	TILE RED	SMOKE	SUN BUFF*	DARK WALNUT
				
BLUE FOG*+	REDWOOD*	TAUPE	ALMOND	CHARCOAL*
				
MAPLE WOOD*+	DOVE GRAY	CONCRETE GRAY	SILVER	GRAY*

Note: All colors shown are intended to show the approximate color of finish, choices, and ranges. Colors are achieved after 2 coats of a penetrating clear sealer. DO NOT use this chart as a final selection. Colors are affected by site conditions and installation procedure. SureCrete recommends making final selections from job specific samples made in the field.

Color Packs can be used with SureStamp, SureSpray, SureTex, SureBroom, Micro Topping and the XS bag mixes. This color chart is not for Ready Mix or integral color use for concrete.

* These colors are available for use in our XS Veining product line

+ These colors are for pigmented sealer in range Special Color 1, and have a higher cost



SureCreteDesign.com
15246 Citrus Country Drive, Dade City, Florida, USA 33523
1.800.544.8488 1.352.567.7973